


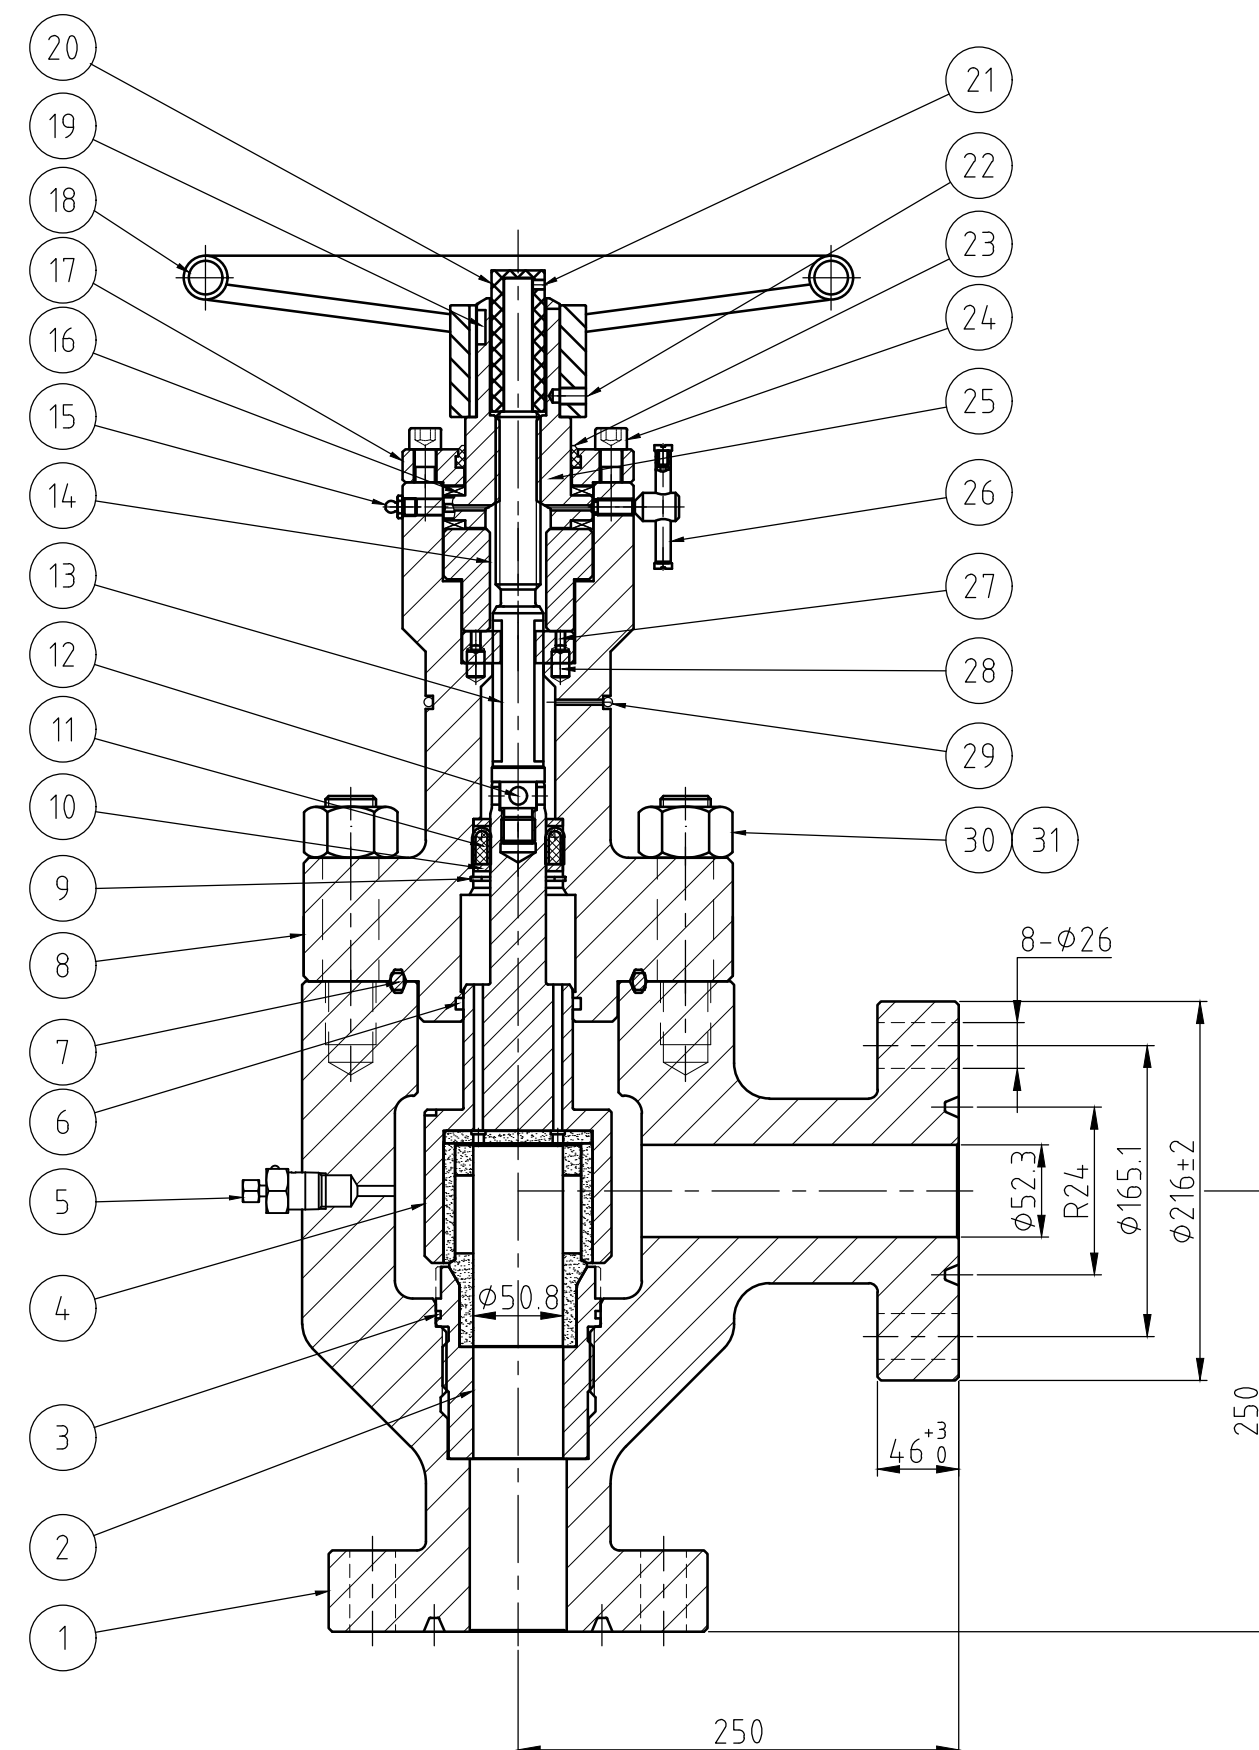

NOTES:

Service Class: Sour Service

Specification: API 6A PR1 PSL3 EE PU

NACE MR-0175

CWP: 5,000PSI

Leakage class : ANSI IV

Design and manufacture to API 6A 21st

Valve test and inspection to API 6A 21st

31	91A18-0	Nut	8	A194-2H	B
30	91B18-142-1	Stud	8	A193-B7	
29	9211-9553	O-Ring	1	NBR	
28	LP10-15	Pin	4	1045	C
27	471-504-142-0	Anti-Rotation ing	1	1045	
26	561001	Lock Screw	1	C.S	
25	471-504-125-9	Stem Nut	1	QSn4-3	D
24	91312-40-1	Cap Screw	8	1045	
23	9212-5870	Dust Ring	1		
22	GBT79-10-18	Cap Screw	1	C.S	E
21	91E06-07-0	Set Screw	1	C.S	
20	471-504-143-9	Indicator	1	Nylon	
19	568001	Key	1	1045	F
18	471-504-117-0	Handwheel	1	C.S	
17	471-605-152-1	Bearing Gland	1	4130	
16	931-6085	Bearing	2	Assy.	G
15	GFM10-1	Oil Cup	1	Cu	
14	471-504-118-0	Bearing Padding	1	1045	
13	471-504-116-2	Upper Stem	1	410	H
12	TX10-28	Pin	1	65Mn	
11	9256-310	Packing	1	PTFE+VITON	
10	471-504-136-2	Junk Ring	2	420	I
9	GB893D1-50	Retainer Ring	1	65Mn	
8	471-504-102-1	Bonnet	1	4130	
7	051-504-113-3	Gasket Ring	1	316SS	J
6	9211-61553	O-Ring	1	HNBR	
5	BP09-16	Bleeder Plug	1	316SS	
4	471-504-105-00	Stem Assy.	1	410+TC	K
3	9211-875355	O-Ring	1	HNBR	
2	471-504-104-00	Seat Assy.	1	410+TC	
1	471-302-101-1	Body	1	4130	L
Item	Drawing no.	Description	Qty.	Material	

	Size Tolerance	Size: A3			GENERAL DRAWING			 Wellhead	Jiangsu Wellhead Drilling Equipment Co.,Ltd.	H
	X: --	Sheet no								
	X.X: --	1 OF 1			DRAWN	ZYH	4/12/21	Adjustable choke valve, External Sleeve Type, 2-1/16"5K, 2" max orifice		
	X.XX: --	Icon			CHKD.					
A	Angles: --	S	A	B	APPV.					
REV	Surf. rms: 	Qty: -			Weight: -		Scale: NTS		471-302-100-0	